

Suitability

A Absorb
Capture reflected sound

B Block
Stop sound travelling

C Cover
Mask unwanted noise


reverb

FABRIC PANELLING



Discreetly designed acoustic fabric panelling for walls and ceilings.

- 25mm thick (class C absorber) 50mm thick (class A absorber) for maximum absorbency.
- Suitable for wall and ceiling based applications.
- Available in plain coloured and patterned fabrics.
- Electrical sockets, switches and flat panel TV screens etc. can be incorporated.
- Discreet design for visual continuity.

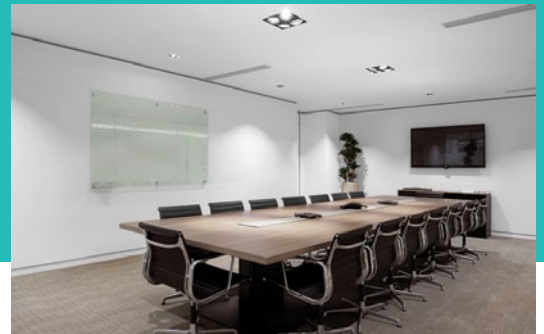

reverb


Fabric panelling



Features

Construction

Reverb fabric panelling comprises an internal absorbing material 25 or 50mm thick, which is covered with a base fabric layer and a finishing plain coloured or patterned fabric. Both are secured in the discreet Reverb gripper track positioned around the perimeter of the panels.

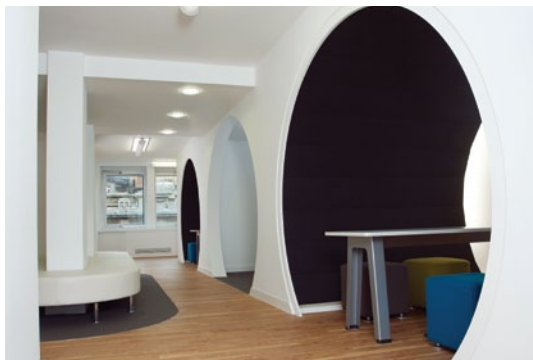

Fabric panel finishes




Plain coloured fabric Patterned fabric

Acoustic performance

Sound absorption performance

Tests carried out in accordance with BS EN ISO 354.

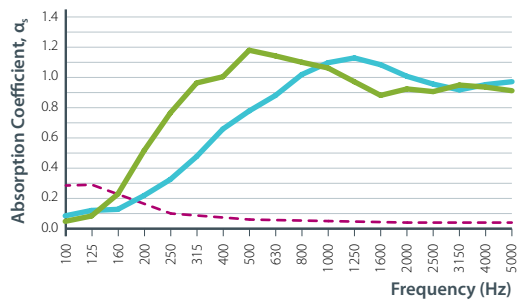

- Reverb fabric panelling – 25mm
- Reverb fabric panelling – 50mm
- - - Typical plasterboard stud wall (12mm panelling)

	Class	α_w	NRC	SAA
Reverb fabric panelling – 25mm	C	0.65 (M,H)	0.80	0.80
Reverb fabric panelling – 50mm	A	1.00	1.00	0.99

Calculated in accordance with BS EN ISO 11654.

Screen Solutions | Defining space | www.screensolutions.co.uk

London showroom

45 Gee Street,
Clerkenwell,
London EC1V 3RS

Head office and factory

Beaufort House, Greenwich Way,
Peacehaven, East Sussex BN10 8HS
T +44 (0) 1273 589922
E sales@screensolutions.co.uk

Follow us

[@ScreenSol](https://twitter.com/ScreenSol)
[linkedin.com/company/screen-solutions-ltd](https://www.linkedin.com/company/screen-solutions-ltd)

